


NO.	DATE	REVISION RECORDS	REVISED	REVISION NO.
-	15/OCT/2019	NEWLY ESTABLISHED.	-	-
△	12/DEC/2022	CHANGE THE NUMBER OF DIGITS IN THE LOT NUMBER	TSUCHIYA	-
-	-	-	-	-

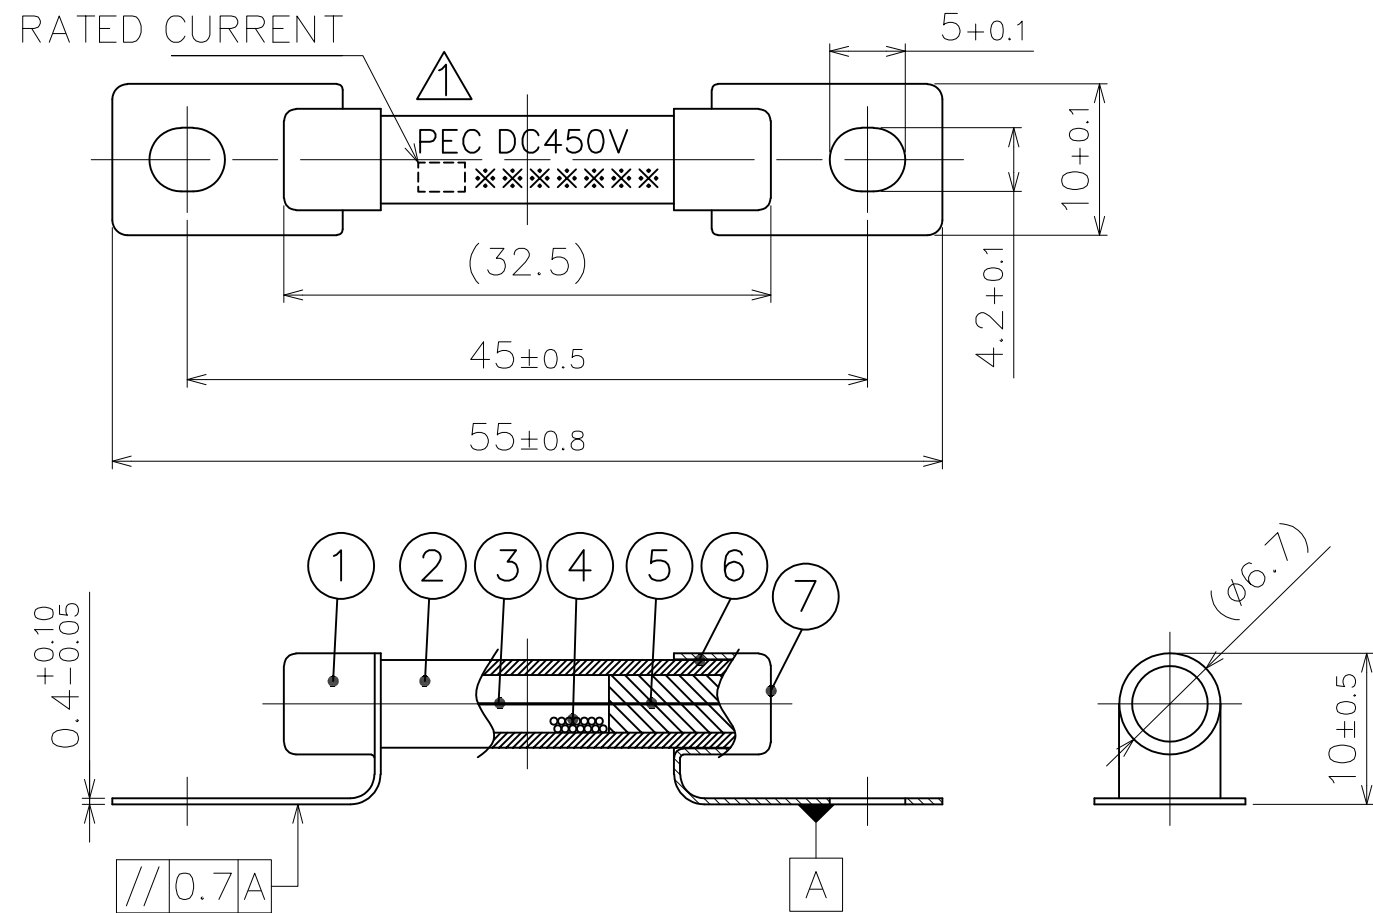

・仕様

- 1. 定格電流 : SEE TABLE
- 2. 定格電圧 : 450V DC
- 3. 遮断容量 : 2000A
- 4. 使用温度範囲 : -40~100℃
- 5. ヒート固定方法 : M4ボルト2本にて固定。
- 6. ヒート性能 : PES-A52-096に準ずる。

・SPECIFICATIONS

- 1. RATED CURRENT : SEE TABLE
- 2. RATED VOLTAGE : 450V DC
- 3. BREAKING CAPACITY : 2000A
- 4. OPERATING TEMPERATURE LIMIT : -40℃~100℃
- 5. FIXING METHOD : USE TWO M4 BOLTS
- 6. PERFORMANCE : BASED ON THE STANDARD OF PEC PES-A52-096.

定格電流 RATED CURRENT	品番 PART No.	包装品番 PACKAGING PART No.
1A	270400*0	270400*1
5A	270500*0	270500*1

7	-	SOLDER	-	TIN ALLOY	-	-
6	-	ADHESIVE	-	EPOXY RESIN	-	-
5	-	COMPOUND	-	SILICONE RESIN	-	-
4	-	ARC-EXTINGUISHING SAND	-	SILICA	-	-
3	-	ELEMENT	1	1A : Ag/5A : Cu	-	-
2	-	CASE	1	CERAMIC	-	-
1	-	CAP	2	COPPER	-	-
NO.	PART NO.	PART NAME	Q'TY	MATERIAL	SIZE	REMARKS

注記

1. 太平洋精工規定(PES-02-04)の環境負荷物質の使用禁止・制限規定を遵守する事。
2. *は製造Lot No.を表示する。

NOTE

1. CONFORM THE REGULATION OF ENVIRONMENTAL LOAD SUBSTANCES BEING PROHIBITED AND LIMITED BY STANDARD OF PEC, PES-02-04.
2. "*" SHOWS PRODUCT LOT No.

APPROVED	<i>H. Akibata</i>	DIMENSION TOLERANCE	ANGULAR TOLERANCE	FINISH		
CHECKED	<i>K. Osada Y. Honda</i>	±0.2	-	-		
DESIGNED	<i>Y. Tsuchiya</i>	RUST PREVENTION	MATERIAL			
DRAWN	<i>Y. Tsuchiya</i>	-	SEE TABLE			
SCALE	UNIT	DIAGRAM METHOD	PART NAME			
2:1	mm	THIRD ANGLE PROJECTION	EVFC-φ6.7**A			
DRAWING DATE	DRAWING NAME	3D CAD DATA	PART NO.			
12/NOV/2022	G2704-0-1	-	SEE TABLE			
Pacific Engineering Corporation					SHEET	SIZE
					1 / 1	A3