


# MUSB-F

For 9 circuits

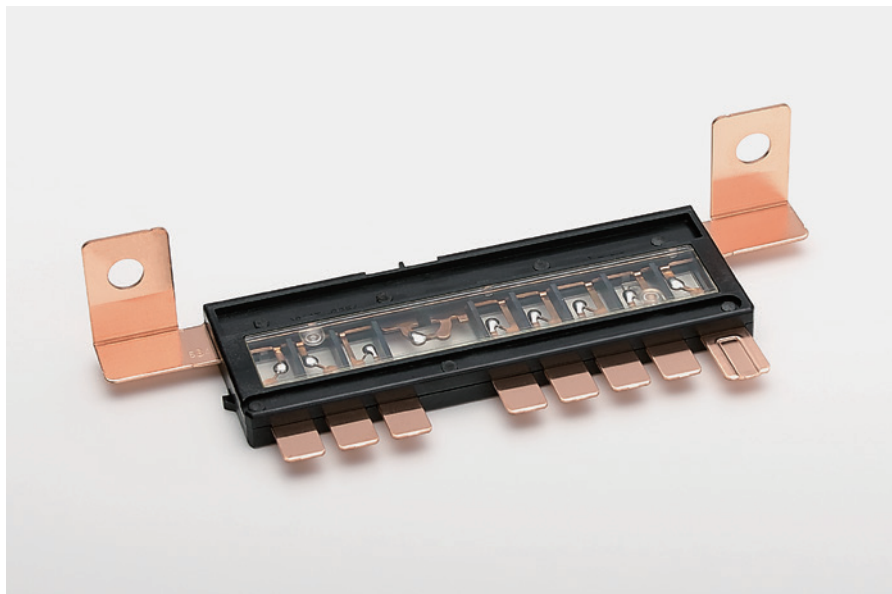


## General Specification

|                             |               |
|-----------------------------|---------------|
| Rated Voltage               | DC32V         |
| Breaking Capacity           | 1000A         |
| Recommended Operating Temp. | -40°C~100°C*2 |
| Standard                    | —             |
| Country of Origin           | Japan         |
| Plating                     | —             |
| Standard Packaging          | 160           |

\*2 Please contact us for the details of operating temperature.

## Dimensions

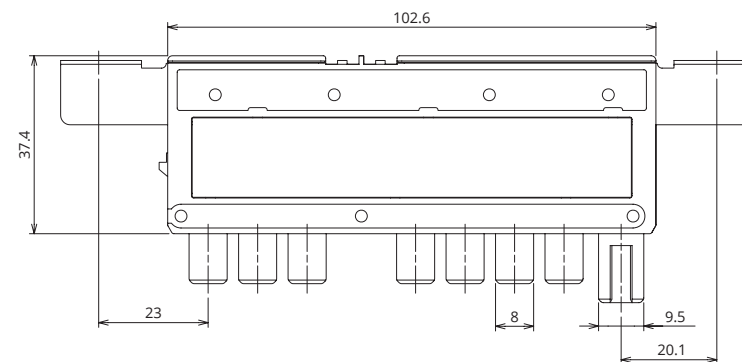

## Product Lineup

|   | Part Number | FUSE 1 | FUSE 2 | FUSE 3 | FUSE 4 | FUSE 5 | FUSE 6 | FUSE 7 | FUSE 8 | FUSE 9 |
|---|-------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1 | 3654        | 60A    | 60A    | 40A    | 40A    | 40A    | 40A    | 60A    | 60A    | 150A   |
| 2 | 3655        | 50A    | 40A    | 30A    | 40A    | 40A    | 40A    | 40A    | 50A    | 150A   |
| 3 | 3656        | 50A    | 50A    | 30A    | 40A    | 40A    | 40A    | 40A    | 80A    | 150A   |
| 4 | 3657        | 50A    | 50A    | 30A    | 40A    | 40A    | 40A    | 40A    | 80A    | 125A   |
| 5 | 3747        | 40A    | 50A    | 50A    | 50A    | 40A    | 30A    | 40A    | 80A    | 150A   |