

Multi Slow Blow Fuse


RoHS

ELV



# MUSB-M2


For 8 circuits

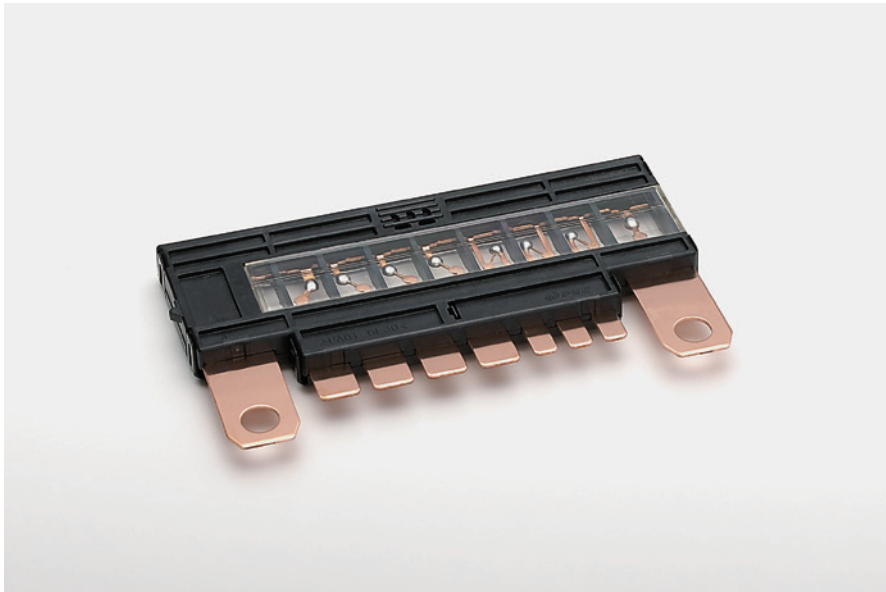

## General Specification

Rated Voltage	DC32V
Breaking Capacity	1000A
Operation Temperature	-40°C~100°C
Standard	—
Country of Origin	Thailand
Plating	—
Standard Packaging	160

## Dimensions

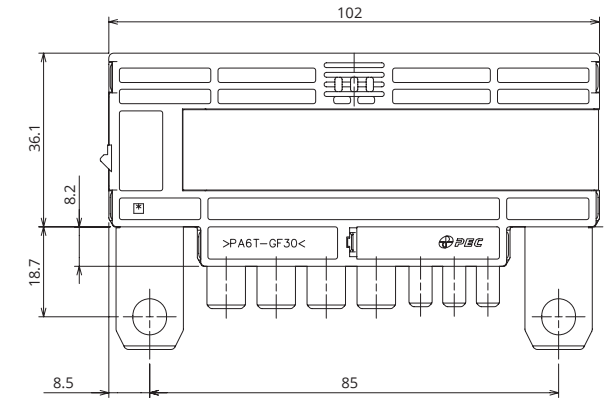

## Product Lineup

	Part Number	FUSE 1	FUSE 2	FUSE 3	FUSE 4	FUSE 5	FUSE 6	FUSE 7	FUSE 8
1	3624	80A	50A	50A	50A	30A	30A	30A	120A
2	3625	80A	50A	50A	50A	30A	30A	30A	140A
3	3731	80A	50A	50A	40A	40A	30A	30A	140A
4	3732	80A	50A	50A	40A	40A	30A	30A	150A
5	3733	50A	50A	50A	40A	30A	30A	40A	100A
6	3734	80A	50A	50A	30A	30A	30A	40A	140A
7	3735	80A	50A	50A	50A	40A	30A	30A	150A