

# SBFC-JT

## Low-amperage plug-in type fuse




### General Specification


Rated Voltage	DC32V
Breaking Capacity	1000A
Recommended Operating Temp.	-40°C~120°C*2
Standard	ISO8820-4
Country of Origin	Mexico
Plating	—
Standard Packaging	3,000
Insertion Force	44.1N
Pull-out Load	9.8N~24.5N
Recommended Torque	—

\*2 Please contact us for the details of operating temperature.

### Dimensions

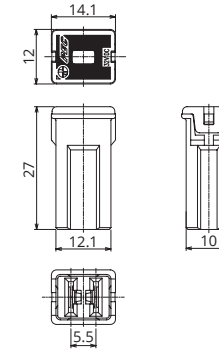

### Cavity



### Product Lineup

Ampere Rating(A)	Part Number	Housing Colors	Resistance Value	Voltage Drop*1
20	3424	Light Blue	4.8 mΩ	113 mV
25	3474	White	3.7 mΩ	105 mV
30	3434	Pink	3.1 mΩ	106 mV
40	3444	Green	2.0 mΩ	92 mV
50	3454	Red	1.7 mΩ	92 mV
60	3464	Yellow	1.2 mΩ	93 mV

\*1 Voltage drop: apply 100% of the rated current.

### Time-Current Characteristic

% of Ampere Rating(A)	Operating Time	
	Min	Max
110%	100hrs.	—
135%	60sec.	1800sec.
200%	5sec.	60sec.
350%	0.2sec.	7sec.
600%	0.04sec.	1sec.

\*The fuse characteristic may change depending on the conditions of use.

### Time-Current Characteristic Chart

