



NO.	DATE	REVISION RECORDS	REVISED	REVISION NO.
-	4/DEC/2024	NEW	Y.HORIBUCHI	-
-	-	-	-	-
-	-	-	-	-

NOTE

- 1.THE MARKING SHALL BE LASER PRINTED AND THE DIRECTION OF THE MARKING SHALL REFER TO THE DRAWING.
- 2."A" PORTION SHOWS COMPANY SYMBOL MARK.
- 3."B" PORTION SHOWS RATED CURRENT.
- 4."C" PORTION SHOWS A DATA MATRIX CODE(DMC).
- 5."D" PORTION SHOWS RATED VOLTAGE.
- 6."E" PORTION SHOWS BREAKING CAPACITY.
- 7."F" PORTION SHOWS PEC'S PART NUMBER.
- 8."G" PORTION SHOWS A PRODUCT LOT NUMBER.
- 9.CONFORM TO THE REGULATION OF ENVIRONMENTAL LOAD SUBSTANCES BEING PROHIBITED AND LIMITED BY PES-02-04.

注記

- 1.表示はレーザーマーカで印字する事。
表示は図面の向きで印字する事。
- 2.A部に当社ロゴを示す。
- 3.B部に定格電流を示す。
- 4.C部はデータマトリックスコード(DMC)を示す。
- 5.D部に定格電圧を示す。
- 6.E部に最大遮断容量を示す。
- 7.F部に当社品番を示す。
- 8.G部に当社製造Lot No.を示す。
- 9.太平洋精工規定(PES-02-04)の環境負荷物質の使用禁止・制限規定を遵守する事。

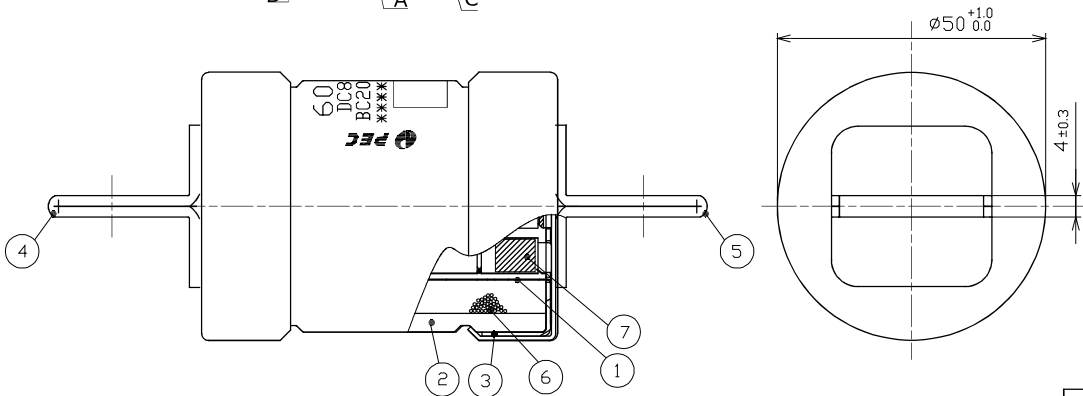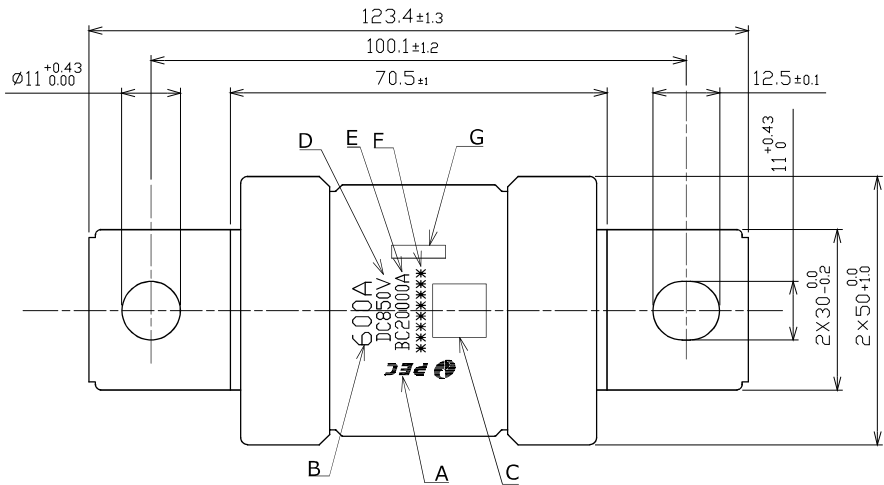

仕様

- 1.定格電圧 : 850V
2.定格遮断容量 : 20,000A
3.使用温度範囲 : -40℃~85℃
4.保管温度範囲 : -40℃~85℃
5.取り付け固定方法 : M10ボルト2本にて固定

TABLE 1

PART NAME 品名	RATED CURRENT 定格電流	PART No. 品番
EVFP-φ51 600A 850V	600A	SG0000AZ
EVFP-φ51 700A 850V	700A	SG0100AZ

SPECIFICATIONS

- 1.RATED VOLTAGE : 850V
2.BREAKING CAPACITY : 20,000A
3.OPERATING TEMPERATURE LIMIT : -40℃~85℃.
4.STORAGE TEMPERATURE LIMIT : -40℃~85℃
5.FUSE FIXING METHOD : USE TWO M10 BOLTS.

7	-	COMPOUND	-	SILICONE	-	-
6	-	ARC-EXTINGUISHING SAND	-	SILICA	-	-
5	-	OUTSIDE CAP ASSY B	1	COPPER	-	-
4	-	OUTSIDE CAP ASSY A	1	COPPER	-	-
3	-	INSIDE CAP	2	COPPER	-	-
2	-	CASE	1	GLASS MELAMINE	-	-
1	-	ELEMENT	8	COPPER	-	-
NO.	PART NO.	PART NAME	Q'TY	MATERIAL	SIZE	REMARKS

APPROVED	A. Iwata	DIMENSION TOLERANCE	±0.5	ANGULAR TOLERANCE	-	FINISH	-
CHECKED	K. Osada	RUST PREVENTION	-	MATERIAL	SEE TABLE		
DESIGNED	Y. Horibuchi	3D CAD DATA	-	PART NAME	EVFP-φ51 **A 850V (SEE TABLE 1)		
DRAWN	Y. Horibuchi	DRAWING DATE	4/DEC/2024	PART NO.	SEE TABLE 1		

Pacific Engineering Corporation

SHEET
1 / 1
SIZE
A3